

Risk and Safety
in
Civil, Surveying and Environmental
Engineering

Prof. Dr. Michael Havbro Faber
Swiss Federal Institute of Technology
ETH Zurich, Switzerland

Decision Analysis in Engineering

- Introduction to Decision Theory
 - The problem
 - The decision tree
 - Prior decision analysis
 - Posterior decision analysis
 - Pre-posterior decision analysis

Decision Analysis in Engineering

- The basic engineering problem

Several solutions may be identified




The available information is uncertain




A decision must be made !


Solution B and F

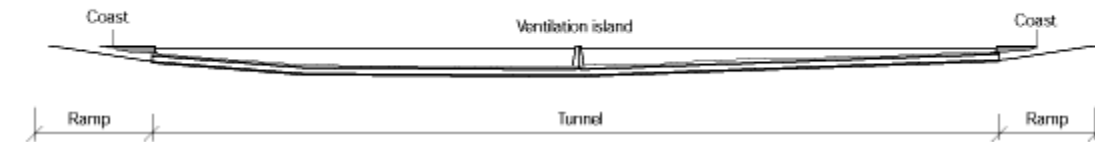


Solution A and E

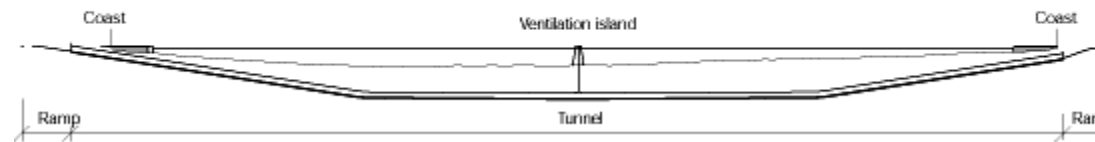

Solution D

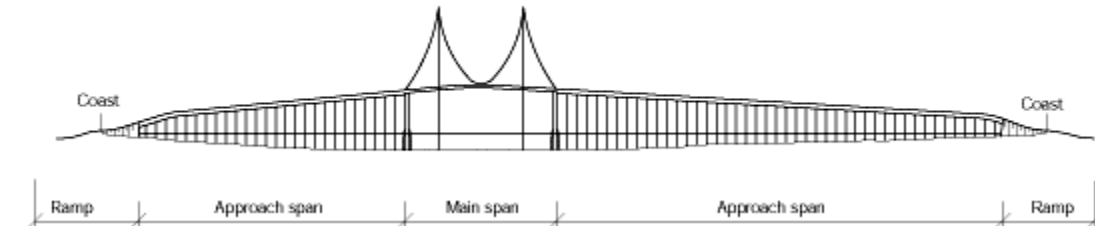

Solution C

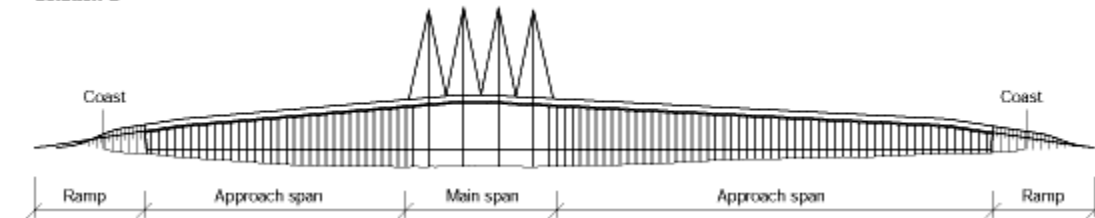



Decision Analysis in Engineering

Approach

- **Formulation of the decision problem**
 - The decision maker and the preferences of the decision maker must be identified
 - Mapping of the decision process
 - All the possible decision alternatives must be identified
 - Identification of the contributing uncertainties
- **Identification of potential consequences and their utility (cost/benefit)**
- **Assessment of the probabilities of the consequences**
- **Comparison of the different decision alternatives based on their expected utilities**
- **Final decision making and reporting of the assumptions underlying the selected alternative**

Decision Analysis in Engineering

- The decision tree

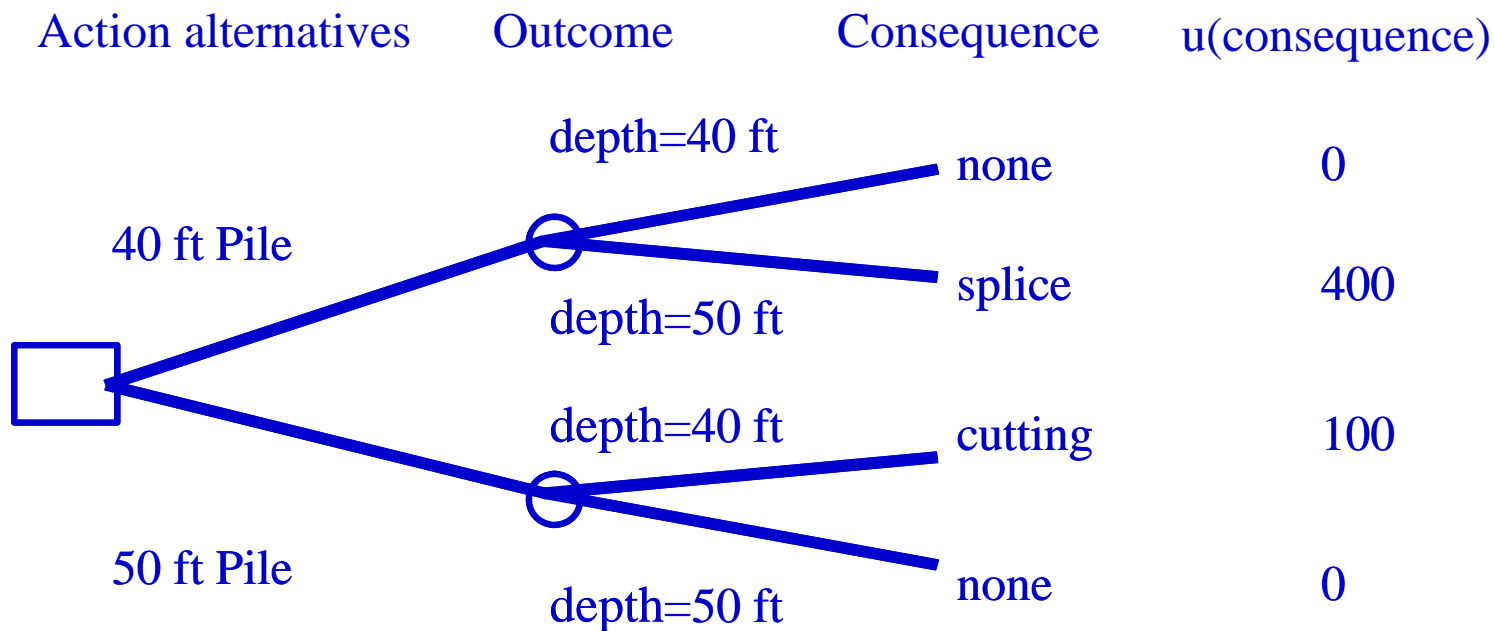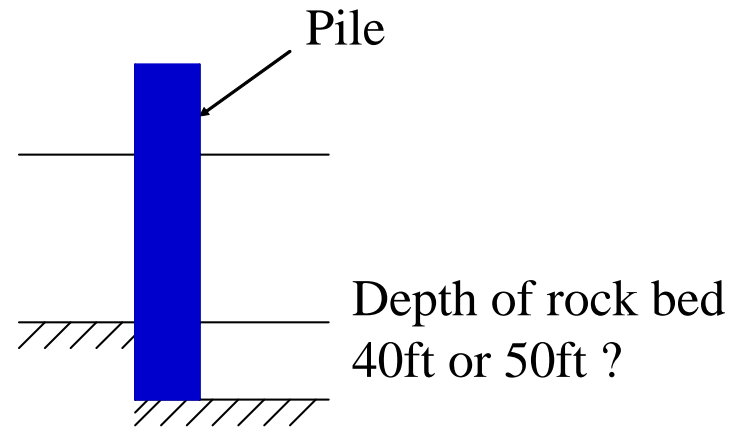

Decision Analysis in Engineering

Assignment of utility

- The assignment of utility must reflect the preferences of the decision maker
- Utility functions may be defined as linear functions in monetary unity
- It is important to include all monetary consequences in the utility function

$$u(a_i) = \sum_{j=1}^n p_j \cdot u(K_j)$$

$u(a_i)$... Utility (cost/benefit) associated with action a_i

$p_j \cdot u(K_j)$... Expected utility associated with consequence K_j

p_j ... Probability of the occurrence of the consequence K_j

$u(K_j)$... Utility associated with the consequence K_j

K_j ... A potential consequence associated with the action a_i

Decision Analysis in Engineering

The different types of decision analysis

- Prior
- Posterior
- Pre-posterior

Illustrated on an example :

Question : What pile length should be applied ?

Alternatives :


a_0 : Choose a 40 ft pile

a_1 : Choose a 50 ft pile

States of nature (depth to rock bed)

0 : Rock bed in 40 ft

1 : Rock bed at 50 ft

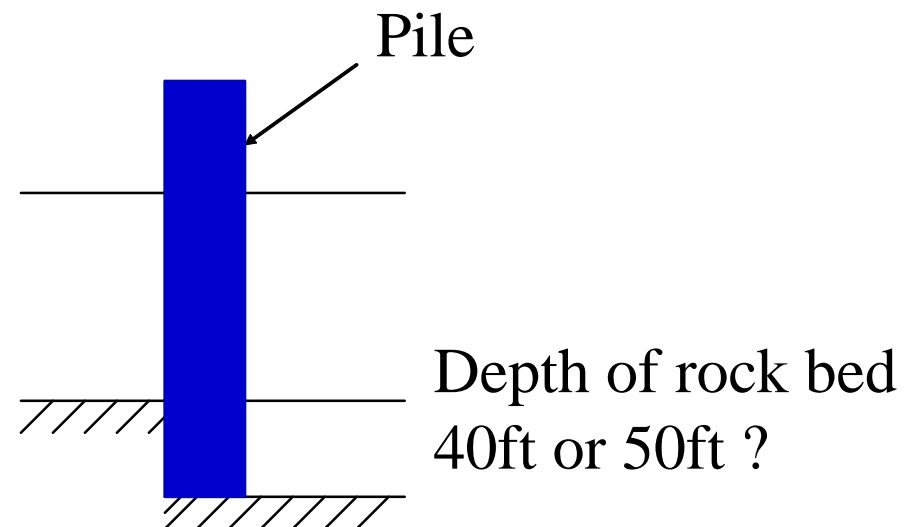


Decision Analysis in Engineering

Prior Analysis

$$P'[\theta_0] = 0.70$$

$$P'[\theta_1] = 0.30$$

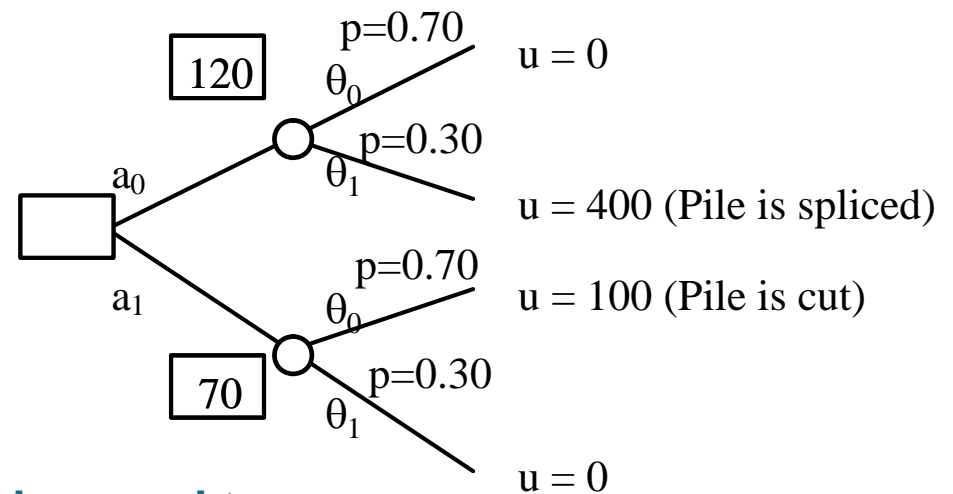

The expected utility is calculated to be equal to

$$E'[u] = \min \{u[a_0], u[a_1]\}$$


$$= \min \{P'[\theta_0] \times u[\theta_0|a_0] + P'[\theta_1] \times u[\theta_1|a_0],$$

$$P'[\theta_0] \times u[\theta_0|a_1] + P'[\theta_1] \times u[\theta_1|a_1]\}$$

$$= \min \{0.7 \times 0 + 0.3 \times 400, 0.7 \times 100 + 0.3 \times 0\}$$

$$= \min \{120, 70\} = 70 \Rightarrow \text{Decision for } a_1 \text{ (50ft Pile)}$$

Decision Analysis in Engineering

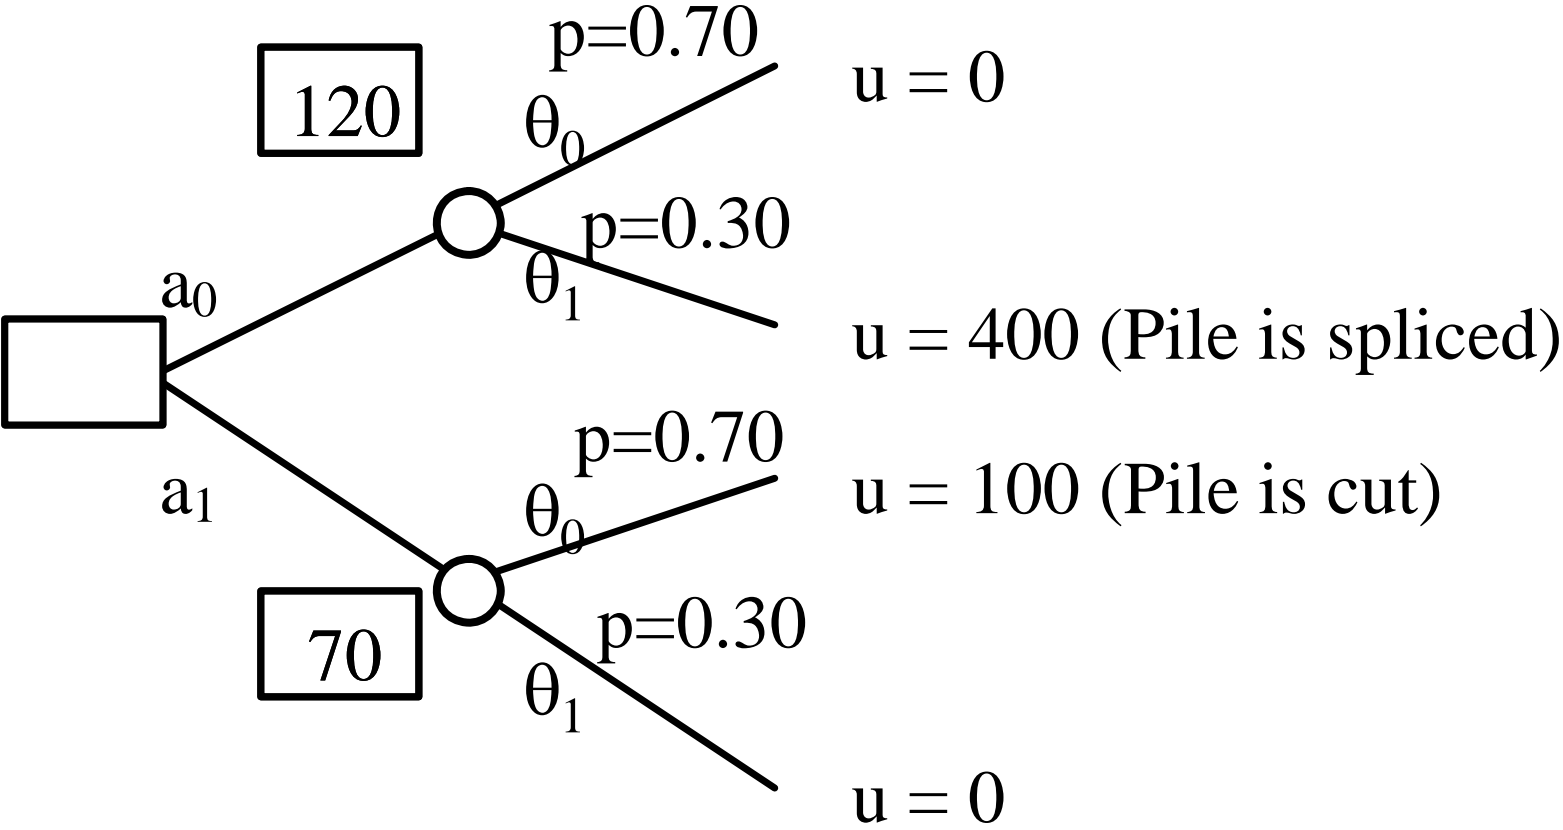

\Rightarrow Choice of pile a_1 (50ft Pile)

Decision Analysis in Engineering




Posterior Analysis

$$P''(\theta_i) = \frac{P[z_k | \theta_i] P'[\theta_i]}{\sum_j P[z_k | \theta_j] P'[\theta_j]}$$

$$\left(\begin{array}{l} \text{Posterior probability of } \theta_i \\ \text{with given sample outcome} \end{array} \right) = \left(\begin{array}{l} \text{Normalising} \\ \text{constant} \end{array} \right) \times \left(\begin{array}{l} \text{Sample likelihood} \\ \text{given } \theta \end{array} \right) \times \left(\begin{array}{l} \text{prior probability} \\ \text{of } \theta \end{array} \right)$$

Decision Analysis in Engineering

Posterior Analysis

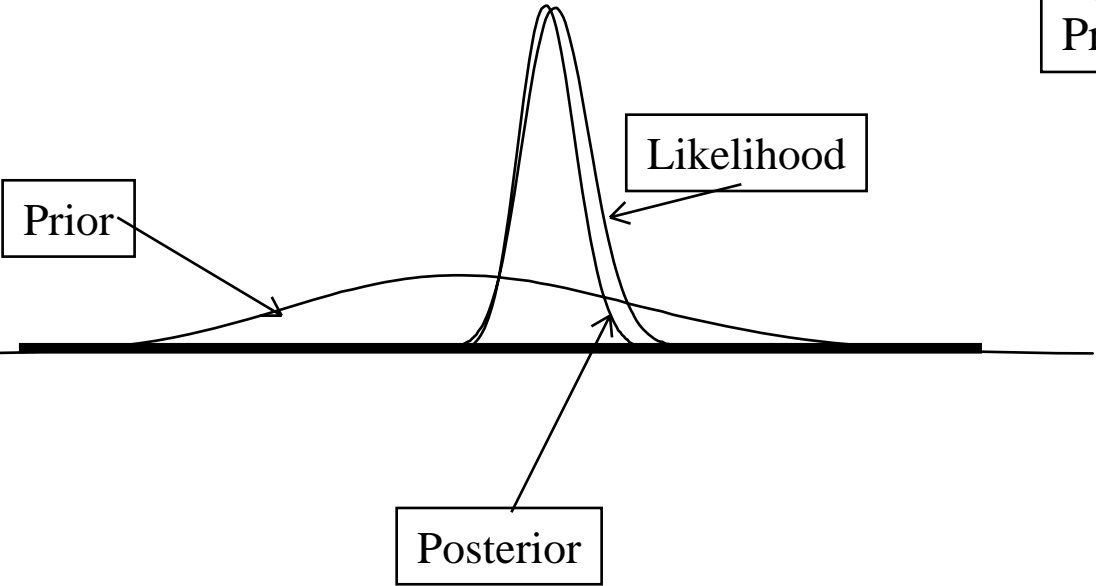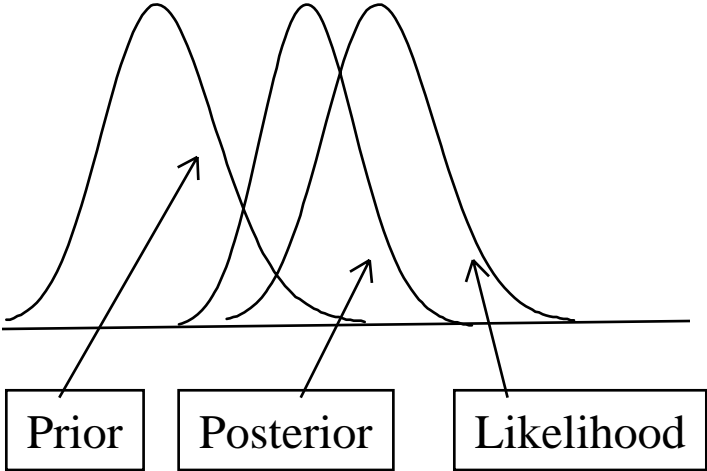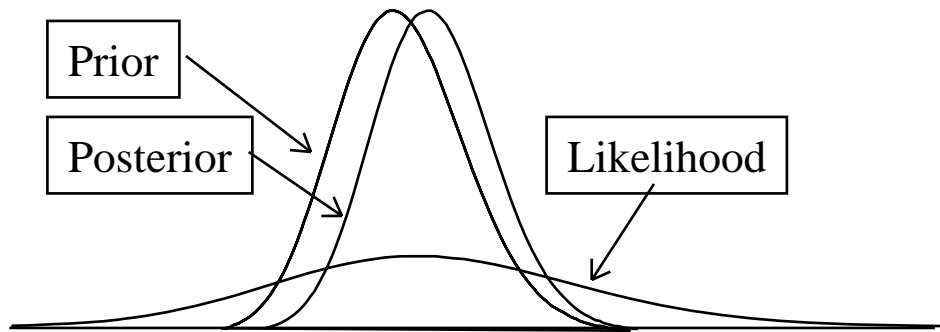

Decision Analysis in Engineering

Posterior Analysis

Ultrasonic tests to determine the depth to bed rock

$$P''(\theta_i) = \frac{P[z_k | \theta_i] P'[\theta_i]}{\sum_j P[z_k | \theta_j] P'[\theta_j]}$$

True state \ Test result	θ_0 40 ft – depth	θ_1 50 ft – depth
z_0 - 40 ft indicated	0.6	0.1
z_1 - 50 ft indicated	0.1	0.7
z_2 - 45 ft indicated	0.3	0.2

Likelihoods of the different indications/test results given the various possible states of nature – ultrasonic test methods $P[z_i | \theta_j]$

Decision Analysis in Engineering

Posterior Analysis

It is assumed that a test gives a 45 ft indication

$$P''(\theta_i) = \frac{P[z_k | \theta_i] P'[\theta_i]}{\sum_j P[z_k | \theta_j] P'[\theta_j]}$$

$$P''[\theta_0] = P[\theta_0 | z_2] \propto P[z_2 | \theta_0] P[\theta_0] = 0.3 \times 0.7 = 0.21$$


$$P''[\theta_1] = P[\theta_1 | z_2] \propto P[z_2 | \theta_1] P[\theta_1] = 0.2 \times 0.3 = 0.06$$

$$P''[\theta_0 | z_2] = \frac{0.21}{0.21 + 0.06} = 0.78$$

$$P''[\theta_1 | z_2] = \frac{0.06}{0.21 + 0.06} = 0.22$$

Decision Analysis in Engineering

Posterior Analysis

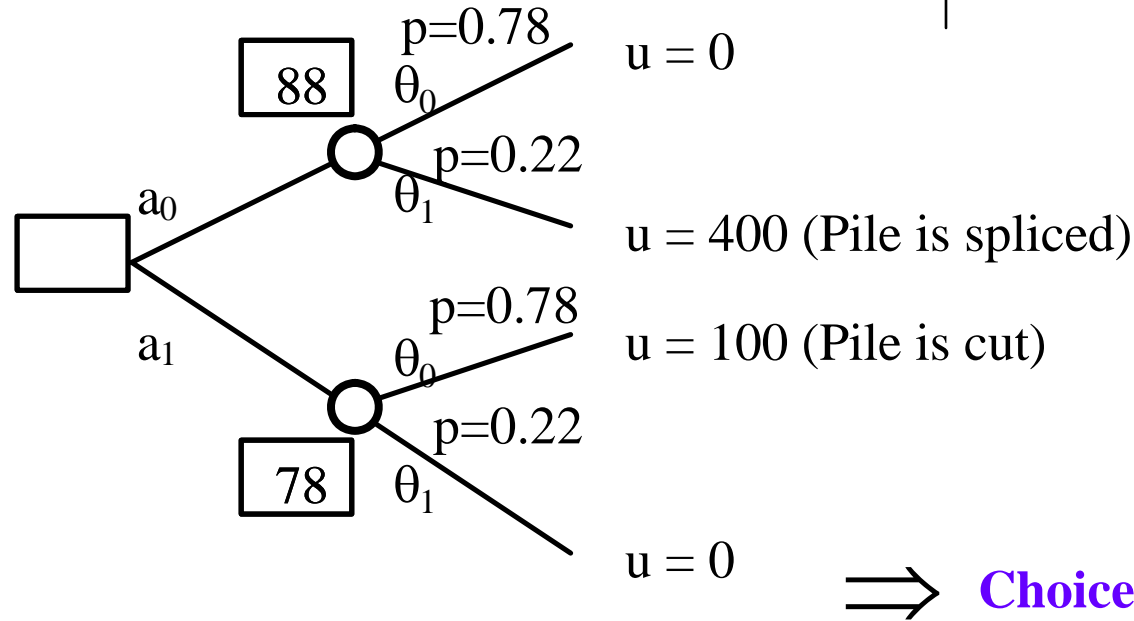

Test result indicates 45ft to rock bed

⇒ Choice of alternative a_1 (50ft Pile)


Decision Analysis in Engineering

Posteriori Analysis

$$E''[u|z_2] = \min_j \{ E''[u(a_j)|z_2] \}$$

$$\begin{aligned} &= \min \{ P''[\theta_0] \times 0 + P''[\theta_1] \times 400, P''[\theta_0] \times 100 + P''[\theta_1] \times 0 \} \\ &= \min \{ 0.78 \times 0 + 0.22 \times 400, 0.78 \times 100 + 0.22 \times 0 \} \\ &= \min \{ 88, 78 \} = 78 \end{aligned}$$

⇒ **Choice of alternative a_1 (50ft Pile)**

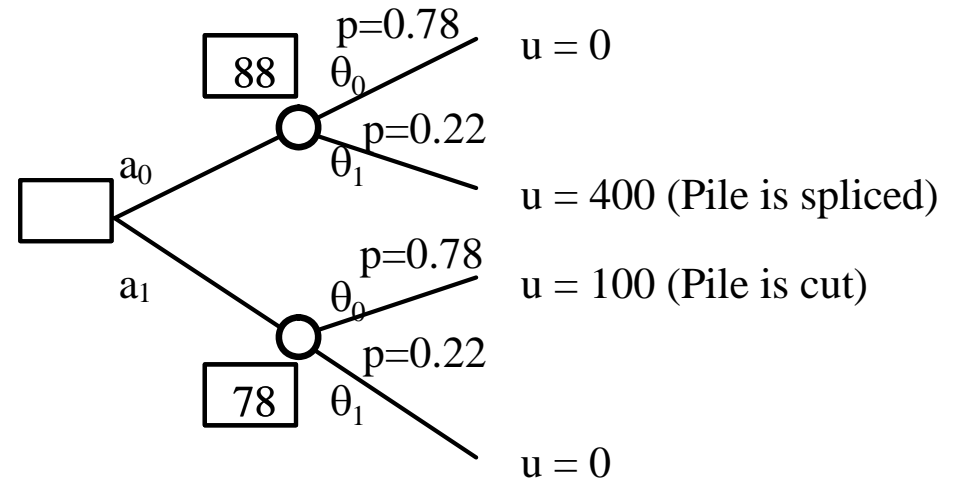

Decision Analysis in Engineering

Pre-posterior Analysis

$$E[u] = \sum_{i=1}^n P'[z_i] \times E''[u|z_i] = \sum_{i=1}^n P'[z_i] \times \min_{j=1,m} \{ E''[u(a_j)|z_i] \}$$

$$P'[z_i] = P[z_i|\theta_0] \times P'[\theta_0] + P[z_i|\theta_1] \times P'[\theta_1]$$

$$P'[z_0] = P[z_0|\theta_0] \times P'[\theta_0] + P[z_0|\theta_1] \times P'[\theta_1] = 0.6 \times 0.7 + 0.1 \times 0.3 = 0.45$$


$$P'[z_1] = P[z_1|\theta_0] \times P'[\theta_0] + P[z_1|\theta_1] \times P'[\theta_1] = 0.1 \times 0.7 + 0.7 \times 0.3 = 0.28$$

$$P'[z_2] = P[z_2|\theta_0] \times P'[\theta_0] + P[z_2|\theta_1] \times P'[\theta_1] = 0.3 \times 0.7 + 0.2 \times 0.3 = 0.27$$

Decision Analysis in Engineering

Pre-posterior Analysis

$$E''[u|z_0] = \min_j \{ E''[u(a_j)|z_0] \} =$$

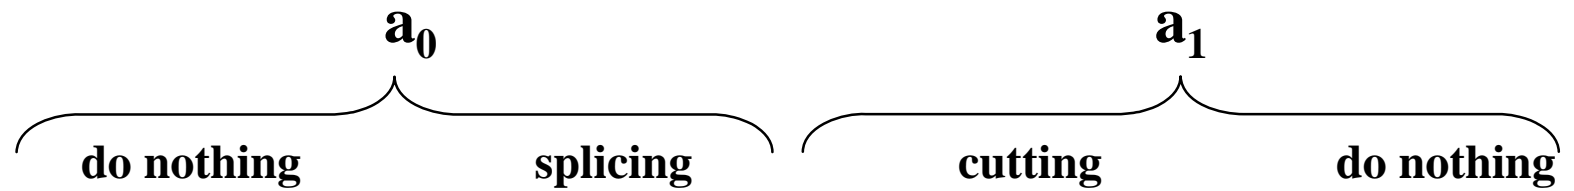

$$\min \{ P''[\theta_0|z_0] \times 0 + P''[\theta_1|z_0] \times 400, P''[\theta_0|z_0] \times 100 + P''[\theta_1|z_0] \times 0 \}$$


$$\min \{ 0.93 \times 0 + 0.07 \times 400, 0.93 \times 100 + 0.07 \times 0 \} =$$

$$0.07 \times 400 + 0.93 \times 0 = 28$$

Decision Analysis in Engineering

Pre-posterior Analysis

$$E''[u|z_1] = \min_j \{ E''[u(a_j)|z_1] \} =$$

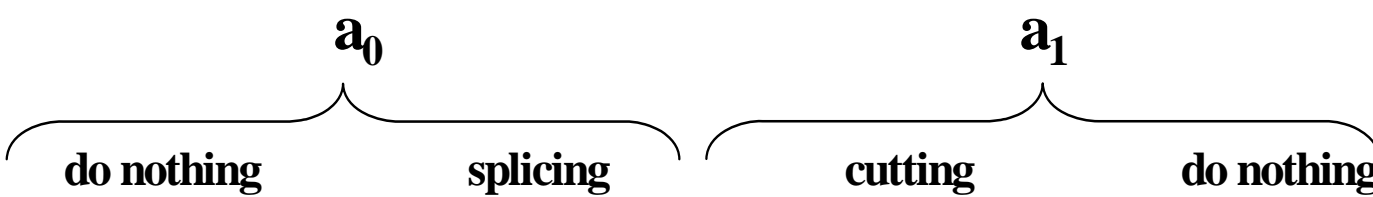

$$\min \{ P''[\theta_0|z_1] \times 0 + P''[\theta_1|z_1] \times 400, P''[\theta_0|z_1] \times 100 + P''[\theta_1|z_1] \times 0 \}$$
$$\min \{ 0.25 \times 0 + 0.75 \times 400, 0.25 \times 100 + 0.75 \times 0 \} =$$
$$0.25 \times 100 + 0.75 \times 0 = 25$$

Decision Analysis in Engineering

Pre-posterior Analysis


The minimum expected costs based on pre-posterior decision analysis
– not including costs of experiments

$$E[u] = \sum_{i=1}^n P'[z_i] \times E''[u|z_i] = 28 \times 0.45 + 25 \times 0.28 + 78 \times 0.27 = 40.66$$

Allowable costs for the experiment

$$E'[u] - E[u] = 70.00 - 40.66 = 29.34$$

Decision Analysis in Engineering

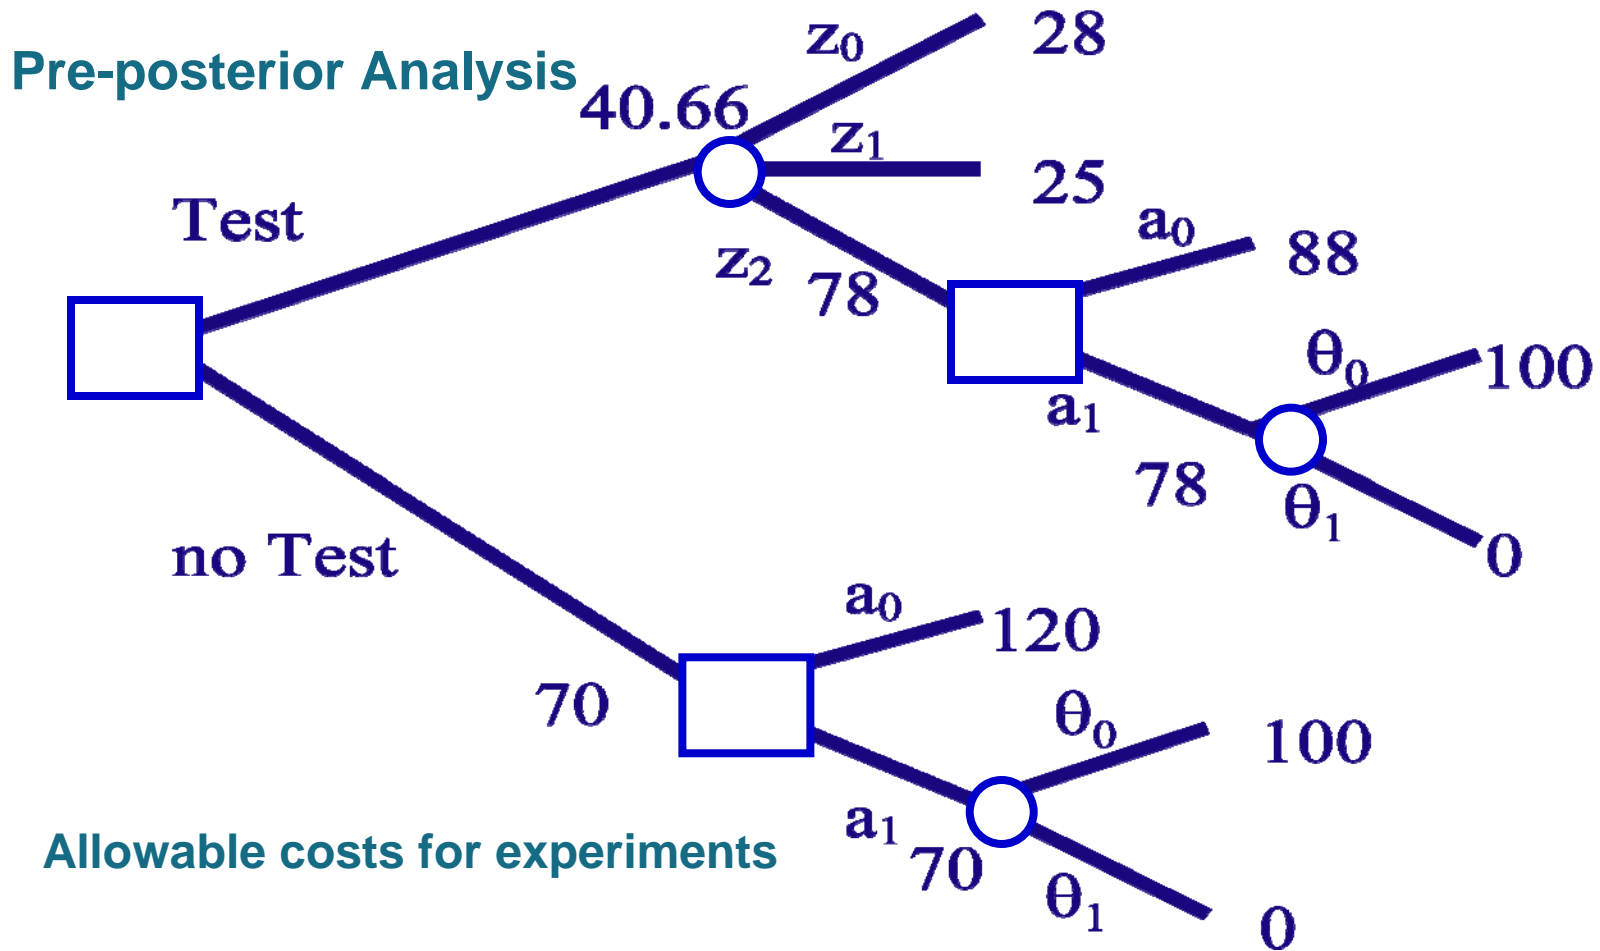

$$E'[u] - E[u] = 70.00 - 40.66 = 29.34$$